


**LINEAL POWER HEATING BANDS FOR HIGH TEMPERATURE, MODELS ELW**

- High flexibility
- Ready to use
- Easy to install
- Does not damage surfaces to which it is applied
- Power supply at one end only
- Minimum curvature radius



**Modelos ELW-GN, clasificadas ATEX**

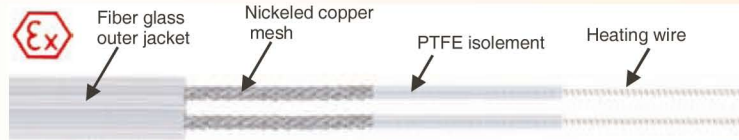

**Technical characteristics**

- Classification ATEX Ex II 2 G EExe II T3, T4, T5
- PTFE insulation
- Nickel copped earth mesh
- Fibre glass outer sheath
- Class I protection
- Supply lead 1200mm long
- Dimensions: 25 x 6 mm
- Minimum curvature radius: 10 mm
- Maximum working temperature: +150 °C
- Maximum temperature of the element: +220 °C
- Nominal voltage: ~230 V

Code	Heating length in mm	W/m	Total Watts
ELW-GN-0,6	600	50	30
ELW-GN-1,1	1100	50	55
ELW-GN-1,6	1600	50	80
ELW-GN-2,1	2100	50	105
ELW-GN-3	3000	50	150
ELW-GN-4,2	4200	50	210
ELW-GN-5	5000	54	270
ELW-GN-6	6000	50	300
ELW-GN-7	7000	50	350
ELW-GN-10	10000	46	460
ELW-GN-12,5	12500	52	650
ELW-GN-14,5	14500	50,3	730
ELW-GN-17,5	17500	49,1	860
ELW-GN-21	21000	47,6	1000
ELW-GN-28	28000	50	1400

**Modelos ELW-VA**




**Technical characteristics**

- Classification ATEX Ex II 2 G EExe II T3, T4, T5
- PTFE insulation
- AISI 304 stainless steel earth mesh
- Class I protection
- Supply lead 1200mm long
- Dimensions of band: 10 x 5 mm
- Dimensions of the head (widthxheightxlength): 32 x 16 x 65 mm
- Minimum curvature radius: 10 mm
- Maximum working temperature: +150 °C
- Maximum temperature of the element: +220 °C
- Nominal voltage: ~230 V



Code	Heating length in mm	W/m	Total Watts
ELW-VA-0,6	600	50	30
ELW-VA-1,1	1100	50	55
ELW-VA-1,6	1600	50	80
ELW-VA-2,1	2100	50	105
ELW-VA-3	3000	50	150
ELW-VA-4,2	4200	50	210
ELW-VA-5	5000	54	270
ELW-VA-6	6000	50	300
ELW-VA-7	7000	50	350
ELW-VA-10	10000	46	460
ELW-VA-12,5	12500	52	650
ELW-VA-14,5	14500	50,3	730
ELW-VA-17,5	17500	49,1	860
ELW-VA-21	21000	47,6	1000
ELW-VA-28	28000	50	1400

**Modelos ELW-H**



**Technical characteristics**

- Fibre glass insulation
- Fibre glass outer sheath
- Protection: it depends on the installation
- Supply lead 1200mm long
- Dimensions: 30 x 5 mm
- Minimum curvature radius: 10 mm
- Maximum working temperature (for +-250W/m): +450 °C
- Maximum temperature of the element: +500 °C
- Nominal voltage: ~230 V

Code	Heating length in mm	W/m	Total Watts
ELW-H-0,5	500	250	125
ELW-H-0,7	700	257,1	180
ELW-H-1	1000	250	250
ELW-H-1,5	1500	250	375
ELW-H-2	2000	250	500
ELW-H-2,5	2500	248	620
ELW-H-3,2	3200	250	800
ELW-H-4	4000	250	1000
ELW-H-5	5000	260	1300
ELW-H-6,3	6300	254	1600
ELW-H-7,9	7900	253,2	2000

