


**Modelos RFA normalizados con tapón roscado 2" en acero inoxidable.**

Código	LIR en mm	Voltios	Wattios	W/cm <sup>2</sup>	Material tubo	Rango de temperatura de los termostatos	
						de control	de seguridad
RFA111S	280	~240	1000	8,4	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA211S	280	~240	2000	5,7	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA311S	280	3~240 Δ 3~415	3000	8,4	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA330S	762	3~240 Δ 3~415	3000	2,8	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA616S	406	3~240 Δ 3~415	6000	11,2	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA630S	762	3~240 Δ 3~415	6000	5,6	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA916S	406	3~240 Δ 3~415	9000	16,8	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA923S	584	3~240 Δ 3~415	9000	11,2	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA926S	660	3~240 Δ 3~415	9000	9,8	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA1223S	584	3~240 Δ 3~415	12000	14,8	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C
RFA1233S	838	3~240 Δ 3~415	12000	10,1	Incoloy-825 Ø8	+5 / +80 °C	+45 / +95 °C

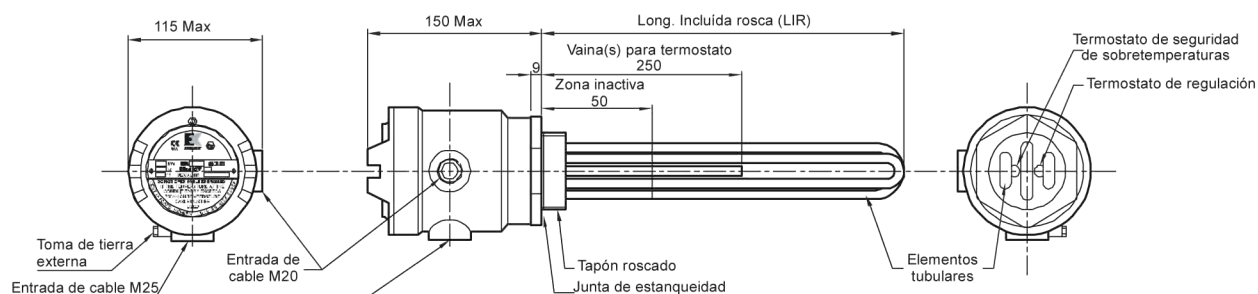

**Santiago Escoin Homs.**

**Apartado / P.Q. Box / B.P. / Potsfach / Postbus: 10.142**

**E-08080-Barcelona-Spain.**

**Tels: 934290345-626150219-609301969. Fax: 933570049**

**emails: santiescoin@gmail.com - santiagoescoin@gmail.com - santiescoin@seker.es**

**web: www.santiescoin.com**