


Modelos RFA normalizados con tapón roscado 2"1/2 en acero inoxidable AISI 316L.

Código	LIR en mm	Voltios	Wattios	W/cm <sup>2</sup>	Material tubo	Rango de temperatura de los termostatos	
						de control	de seguridad
RFA3-15-DS	381	3~240 Δ 3~415	3000	4,7	AISI 321 Ø10	+5 / +80 °C	+95 °C
RFA6-27-DSZ	686	3~240 Δ 3~415	6000	2,8	AISI 321 Ø10	+5 / +80 °C	+95 °C
RFA12-27-DSZ	686	3~240 Δ 3~415	12000	5,3	AISI 321 Ø10	+5 / +80 °C	+95 °C

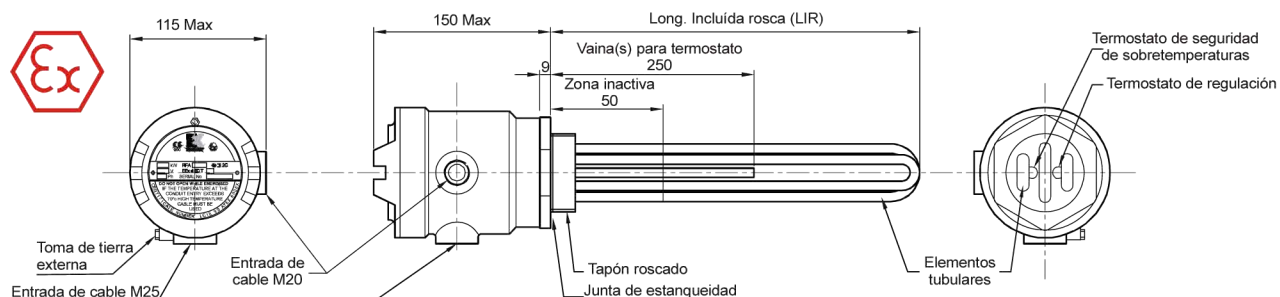

**Santiago Escoin Homs.**

**Apartado / P.Q. Box / B.P. / Potsfach / Postbus: 10.142**

**E-08080-Barcelona-Spain.**

**Tels: 934290345-626150219-609301969. Fax: 933570049**

**emails: santiescoin@gmail.com - santiagoescoin@gmail.com - santiescoin@seker.es**

**web: www.santiescoin.com**