

SHORT WAVE INFRARED EMITTERS, MODELS 81P

General characteristics

Absence of thermic inertia.

Suitable for a wide variety of industrial applications. With high penetration power in almost all materials. For processes in which fast, powerful drying is required.


- Manufactured in transparent quartz crystal.
- With or without built-in gold reflector
- One or two connection ends.
- To order, tubes are made to the client's requirement, their power, voltage and length etc. being able to be varied. The support system will be by clips manufactured in stainless steel.



Specific characteristics models 81P


All standard models of the range 81P are supplied with gold reflector and supply connection by 500m long leads

Code	Dimensions in mm			Volts	Watts
	Tube section	A	B		
81P024B5	22 x 11	405	340	~ 230 V	1200
81P078C5	22 x 11	850	700	~ 230 V	4200
81P069C5	22 x 11	1150	1000	~ 400 V	6000



SHORT WAVE INFRARED EMITTERS IN TRANSPARENT QUARTZ GLASS SINGLE TUBE, SPECIAL MANUFACTURES

To correctly facilitate and identify the infrared emitter, complete the attached table bearing in mind the corresponding diagrammes:

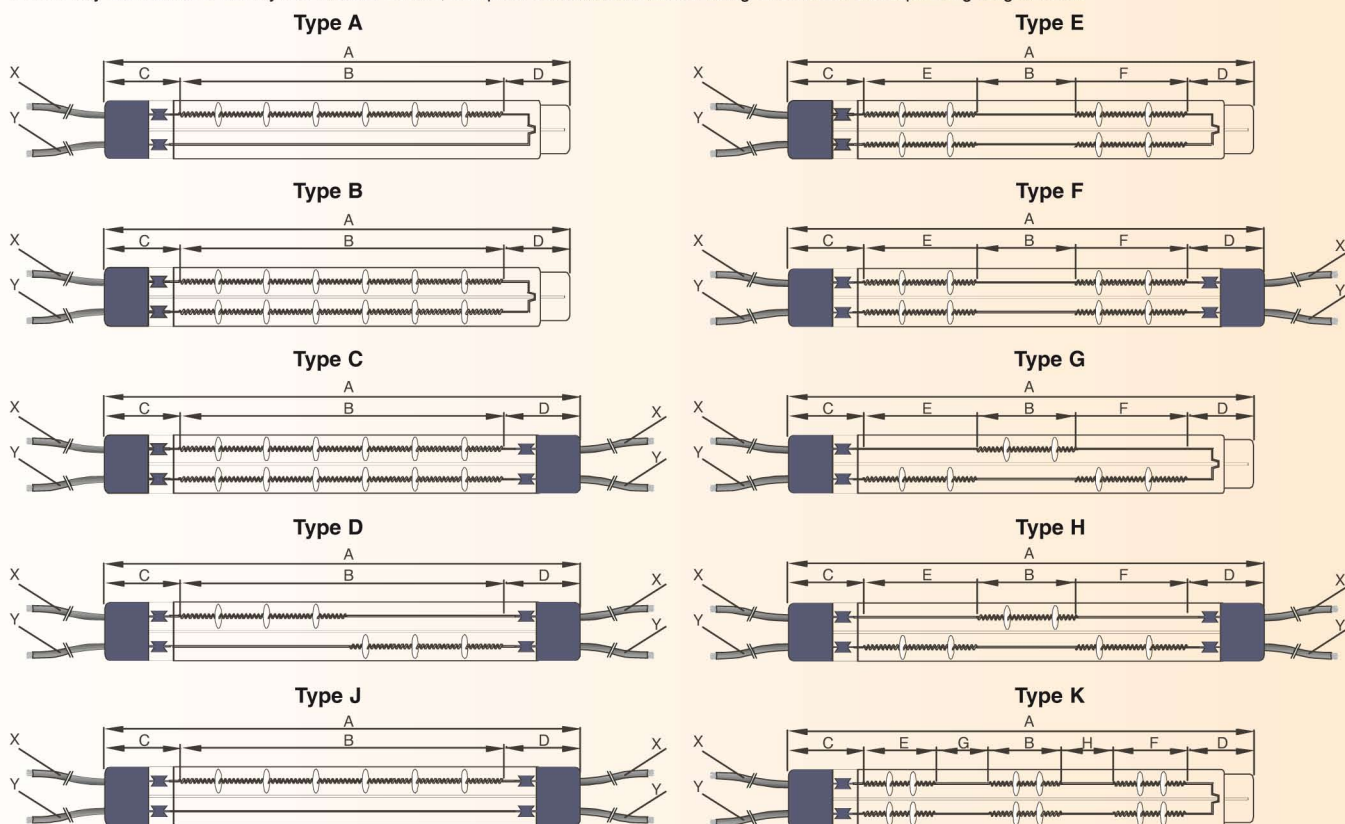

Type	Dimensions in mm		Volts	Watts
	Section tube	A	B	Connections
33 x 16 <input type="checkbox"/>	C	D	X (cable) <input type="checkbox"/>	Length
22 x 11 <input type="checkbox"/>	E	F	Y (The cable is covered with steatite material) <input type="checkbox"/>	Length
WITH gold reflector <input type="checkbox"/>	G	H		
WITHOUT gold reflector <input type="checkbox"/>				