


GROUP 10- Small electric home appliance elements

10.3 - Quartz rod heating elements

BZ



General characteristics

- Resistive coil in Nickel-Chrome alloy
- Quartz tube of Ø10 mm
- Ceramic supports resistant to temperature
- Faston terminals 6'3 mm
- Standard voltage: ~230 V
- If you require, also available for supply with fiber glass tail connection outlets.
- Other power, voltage and models are available on demand.

Code	Watts	Length between slot centre in mm	Adaptable	Weight in Kg
BZ001	600	354	UF	0,07
BZ002	600	370	KE	0,07
BZ003	600	390	KE	0,08
BZ004	600	400	UF	0,08
BZ005	750	455	SO	0,09
BZ006	750	516	UF	0,10
BZ007	750	600	UF	0,13

GROUP 10- Small electric home appliance elements

10.4 - Spiral heating elements

M / MS / MC

Models as per catalogue: 710

General characteristics

- Resistive coil in Nickel-Chrome alloy:
 - Models M: Quality 20-5 → Hotplates
 - Models MS: Quality 80-20 → All applications
 - Models MC: Quality 20-5 → Infrared and quartz tubes
- Standard voltage: ~230 V

Models M

Code	Watts
M001	350
M002	400
M003	500
M004	600
M005	650
M006	700
M007	750
M008	800
M009	850
M010	1000

Models MS

Code	Watts
MS001	350
MS002	400
MS003	500
MS004	600
MS005	480
MS006	850
MS007	1000

Models MC

Code	Watts
MC001	500
MC002	600
MC003	750
MC004	1000


GROUP 10- Small electric home appliance elements

10.5 - Markers, burners and lighters

PA

Models as per catalogue: NTC-9010 / 9090

MARKERS, BURNERS AND LIGHTERS, MODELS PA

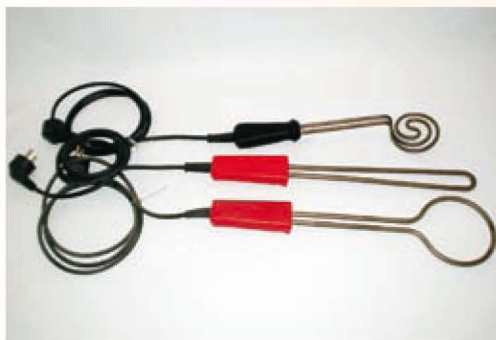

General characteristics

- Tubular elements in stainless steel AISI 321 or Incoloy®-800 tube
- Anatomical handle, with degree protection against moisture IP-20
- Hose cable type H07RN-F of 3 x 0'75 mm², 1500 mm long.
- Connection jack type Schuko of 16 A, with built-in earth connection.
- Standard voltage: ~230 V



Description	Code	L in mm	Watts	Tube material	Weight in Kg	Santi Escoin's constructive thermic class
Round burner of Ø85 mm heating zone.	PA-2	245	350	AISI 321 Ø6,4 mm	0,31	T-700-T
Marker, lighter of Ø115 mm heating zone.	PA-4	295	500	AISI 321 Ø8 mm	0,39	T-700-T
Marker, "U-shape" lighter	PA-3	295	600	Incoloy 800 Ø8 mm	0,37	T-850-T
Marker, long lasting rectangular lighter	PA-5	345	600	Incoloy 800 Ø8 mm	0,42	T-850-T

Santiago Escoin Homs